
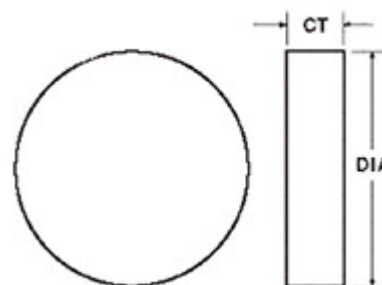


# NEUTRAL DENSITY FILTERS

## Specification

Material:	Neutral Density Glass or <a href="#">Click this to Glass List</a> 
Dimension Tolerance:	±0.1mm
Thickness Tolerance:	±0.02mm
Parallelism:	<3 arc minutes
Flatness:	2λ per 25 mm
Surface Quality:	60 / 40
Optical Density Tolerance:	±5%
Coating:	Vacuum-deposited metallic alloy Or specified by customer



## PRODUCTS LIST

Optical Density	Transmission	N.D.G Φ25mm	N.D.G Φ50mm × 50mm × 2mm	F.S. Φ50mm × 50mm
		Part No.	Part No.	Part No.
0.1	79.4%	SSL-RO-ND-001	SSL-RO-ND-101	SSL-RO-ND-201
0.2	6.31%	SSL-RO-ND-002	SSL-RO-ND-102	SSL-RO-ND-202
0.3	50.1%	SSL-RO-ND-003	SSL-RO-ND-103	SSL-RO-ND-203
0.5	31.6%	SSL-RO-ND-004	SSL-RO-ND-104	SSL-RO-ND-204
0.8	15.8%	SSL-RO-ND-005	SSL-RO-ND-105	SSL-RO-ND-205
1.0	10.0%	SSL-RO-ND-006	SSL-RO-ND-106	SSL-RO-ND-206
2.0	1.0%	SSL-RO-ND-007	SSL-RO-ND-107	SSL-RO-ND-207
3.0	0.1%	SSL-RO-ND-008	SSL-RO-ND-108	SSL-RO-ND-208
4.0	0.01%	SSL-RO-ND-009	SSL-RO-ND-108	SSL-RO-ND-209